


The Premier+. It's Not Your Momma's Fog Generator.



The Premier+ Fog Generator offers the same performance as it's predecessor with additional functionality. The powder-coated aluminum exo-chassis makes it easy to handle and provides greater durability. Using the industrial grade rubber feet rotate the Premier+ 90 degrees to create vertical fog effects. Stack multiple units with the tray accessory to create a fog wall.

The Premier+ includes three modes of operations – Stand-Alone, Analog Remote, DMX/RDM data. The hand-held timer remote functions using the docking station or optional cables. It holds 4L/1 Gallon fog fluid jugs. If extended continuous operation is required and industrial option is available.

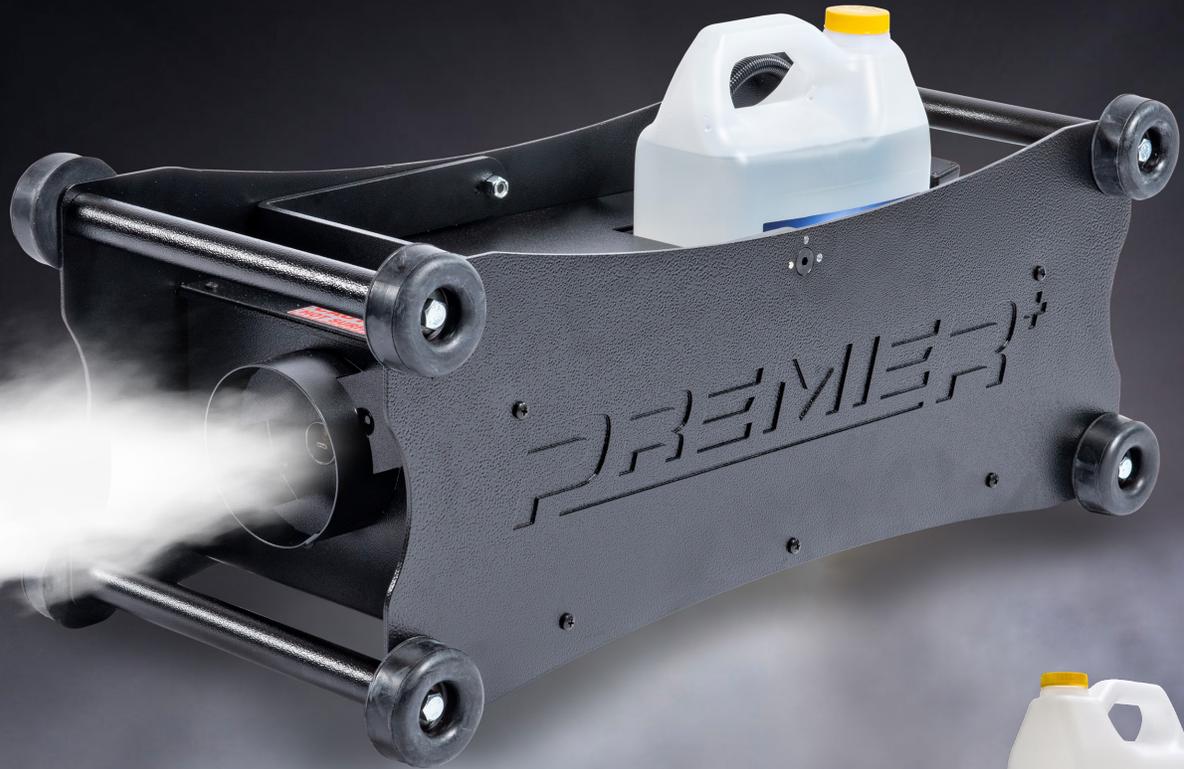

Our Molecular Fog Fluid sets the industry standard with a clean white, thick and fluffy fog, perfect for low fog effects. Using our fluids maintains your five-year warranty against manufacturer's defect.



ultratecfx.com

**SETTING THE STANDARD IN
SPECIAL EFFECTS FOR OVER 25 YEARS**





4" Hose Adapter - removable for custom installations



Hang it from the lighting rig/truss or position it on stage



Industrial grade rubber feet



5-Pin DMX and timer remote with docking station



Rotate the position for vertical fog effects (industrial option only)



Easy grab handles, front and back

Powder coated aluminum exo-chassis



Use stacking blocks to create fog effects with multiple Premier+ Fog Generators

MODELS

CLF-4580	Premier Fog Effects Generator 110V*
	Premier Fog Effects Generator w/Ind'l Optn 110V*
CLF-4581	Premier Fog Effects Generator 220V*
	Premier Fog Effects Generator w/Ind'l Optn 220V*

* Remote Included

OUTPUT

Run Time:	Continuous
Fluid Consumption:	Burst - 127 cc/ min. - Continuous - 57 cc/ min.
Tech. Benchmark Spec.:	8,900 cfm @ 1 meter visibility
Competitive Comparison:	20,000 cfm

WARRANTY

The Premier+ has a five-year warranty against manufacturer's defect and a lifetime warranty on the heat exchanger provided Ultratec fluids are used.

SPECIFICATIONS

Length:	26.5 in / 67.3 cm
Width:	12.25 in / 31 cm
Height:	11 in / 28 cm
Net Weight	40 lbs / 18.14 kg
Power Cord:	6 ft - 1.8 m
Heater Watts:	1400 w
Rating - 110V:	12 Amps at 50/60 Hz
Rating - 220V:	6 Amps at 50/60 Hz

Visit www.ultratecfx.com for a complete set of specifications on all models.

ultratecfx.com

Canada - USA - Germany

Phone: 519-659-7972 / Toll Free: 800-388-0617 Email: sales@ultratecfx.com

